




## Flexible solution, good performance

### **START** Downlight Flat Dimmable

The START Downlight Flat Dimmable family provides the perfect integrated LED solution for the replacement of traditional CFL downlights. The range is available in round shape in recessed and surface mounted versions providing flexibility for different installation areas.



# START Downlight Flat Dimmable

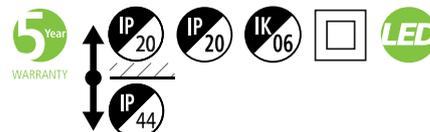

## Features

- Start Downlight Flat Dimmable range is available in round shape, recessed or surface mounted with separate, phase dimmable driver
- Ideal for applications such as corridors, back of house areas and any locations that require long service hours and frequent switching
- A very slim design of recess depth of 21mm makes it perfect for shallow void ceilings
- IP44 from the front for recessed versions makes it ideal for bathroom application
- Achieve up to 60% extra energy savings with dimmable function
- Quick and easy to install with the inclusion of a loop in - loop out box
- Cost effective product - will help you comply with Building regulations - up to 103lm/W (round 1750lm 4000K version)
- Slim design:
  - Recessed depth as low as <21mm
  - Surfaced mounted height of 38mm
- 3000K Warm White and 4000K Neutral White
- MacAdam Ellipse: 3
- Construction material: Aluminium, Steel
- Photobiological Risk Group : 0

## Product information

Code	Description	Finish	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Beam Angle (°)	Colour Temperature (K)	CRI	Dimmable	Control Technology
<b>Recessed Round</b>										
0054118	START Downlight Flat 108 IP44 550lm 830 DIM	White	7	550	79	120	3000	80	Yes	Phase dimmable
0054119	START Downlight Flat 108 IP44 600lm 840 DIM	White	7	600	86	120	4000	80	Yes	Phase dimmable
0054120	START Downlight Flat 157 IP44 1000lm 830 DIM	White	12	1000	83	120	3000	80	Yes	Phase dimmable
0054121	START Downlight Flat 157 IP44 1100lm 840 DIM	White	12	1100	92	120	4000	80	Yes	Phase dimmable
0054122	START Downlight Flat 205 IP44 1550lm 830 DIM	White	17	1550	91	120	3000	80	Yes	Phase dimmable
0054123	START Downlight Flat 205 IP44 1750lm 840 DIM	White	17	1750	103	120	4000	80	Yes	Phase dimmable
0054124	START Downlight Flat 205 IP44 2200lm 830 DIM	White	24	2200	92	120	3000	80	Yes	Phase dimmable
0054125	START Downlight Flat 205 IP44 2250lm 840 DIM	White	24	2250	94	120	4000	80	Yes	Phase dimmable
<b>Surface- mounted Round</b>										
0054128	START Downlight Flat 226 1700lm 830 DIM SM	White	17	1700	100	120	3000	80	Yes	Phase dimmable
0054129	START Downlight Flat 226 1750lm 840 DIM SM	White	17	1750	103	120	4000	80	Yes	Phase dimmable

## Accessories

Code	Description
0046600	Emergency Pack Manual Testing 6V-55V
0046601	Emergency Pack Self Test/DALI monitoring 6V-55V


## Additional Images



START Downlight Flat recessed dimmable round


START Downlight Flat surface mounted dimmable round

# START Downlight Flat Dimmable

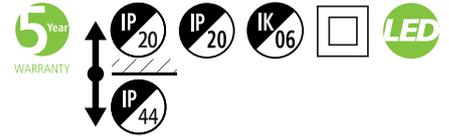


Dimensions (mm)


## START Downlight Flat Dimmable recessed

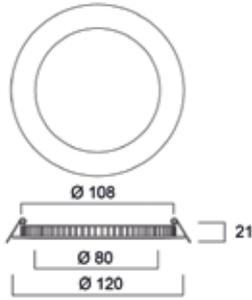

START Downlight Flat 108

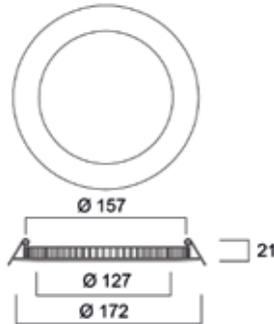


START Downlight Flat 157

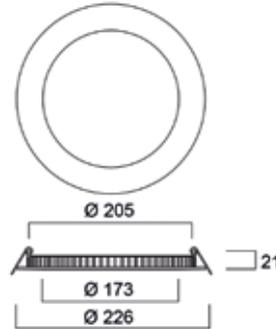


STAR Downlight Flat 205

## START Downlight Flat Dimmable surface mounted

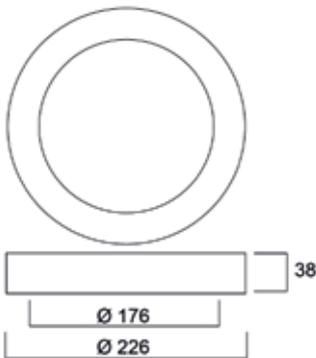

START Downlight Flat 226

## Photometric data



Start Downlight flat round

# SYLVANIA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

Copyright Feilo Sylvania International Group Kft. February 2023

[sylvania-lighting.com](http://sylvania-lighting.com)

A Feilo Sylvania Company