



PROTM

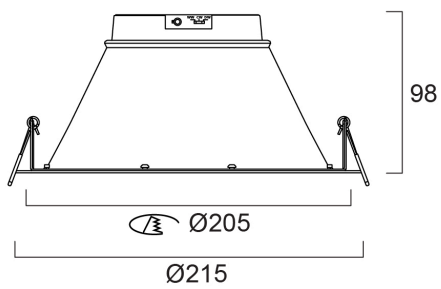

Distance [m]	Cone diameter [m]	Beam diameter [mm]	Illuminance [lx]
0.5	0.87 0.86	Ø171 Ø169	320 106
1.0	1.14 1.11	Ø229 Ø217	80 273
1.5	1.71 1.67	Ø343 Ø331	36 122
2.0	2.28 2.23	Ø457 Ø445	16 49
2.5	2.85 2.78	Ø571 Ø559	10 31
3.0	3.42 3.34	Ø685 Ø673	6 21

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 55.2°)
 — C90 - C270 (Half beam angle: 59.4°)

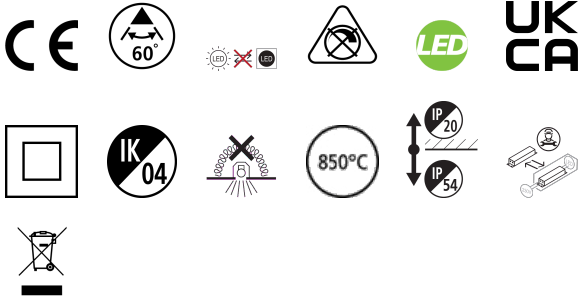