

ToLEDo LYNX DE

ToLEDo Lynx DE 770LM G24Q 840 SL

0030224



Product features

- LED replacement for compact fluorescent Lynx-DE lamps
- 30,000 hours average rated life (L70 F50)
- 3 years warranty
- Quick, simple and safe replacement without rewiring
- Direct retrofit - easiest way to upgrade existing luminaires to LED technology
- Suitable for electronic ballast/ ECG ballast
- Compact and durable construction
- Minimum and maximum operating temperature: -20°C to 45°C
- Low energy consumption and no flickering
- Ideal for commercial and residential applications including offices, hotels, restaurants, warehouses, supermarkets, corridors, in addition to living rooms, kitchens and garages
- Warning: ToLEDo Lynx DE lamps are not suitable for magnetic ballast/CCG and direct mains 220-240V AC operation



NOT SUITABLE FOR
HOUSEHOLD ROOM
ILLUMINATION

PRODUCT OVERVIEW

Product name	ToLEDo Lynx DE 770LM G24Q 840 SL
Technology	LED
Lamp shape	U shape
Type	LED exchangeable
Cap/Base	G24q-2
Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941329
Warranty	3 years
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6

ToLEDo LYNX DE

ToLEDo Lynx DE 770LM G24Q 840 SL

0030224

Beam Angle (°)	280
Photobiological Risk Group	RG0
Wattage (W)	7
Product Voltage (V)	40
Dimmable	No
IP rating	IP20
Product EAN number	5410288302249

DATA TABLE

General data

Product name	ToLEDo Lynx DE 770LM G24Q 840 SL
Technology	LED
Lamp shape	U shape
Type	LED exchangeable
Cap/Base	G24q-2
Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
ETIM Class	EC001959
E-number FI	4941329
Warranty	3 years

Optical data

Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	280
Photobiological Risk Group	RG0

Electrical data

Wattage (W)	7
Equivalent watt (W)	18
Product Voltage (V)	40
Control gear required	Yes
Transformer required	Yes
Dimmable	No
Inrush Current (A)	7
Inrush Duration (µs)	800
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

IP rating	IP20
Nominal Product Length (mm)	152

ToLEDo LYNX DE

ToLEDo Lynx DE 770LM G24Q 840 SL

0030224

Nominal Product Width (mm)	34
Nominal Product Height (mm)	34
Weight (kg)	0.062


Packaging

Single packaging type	Carton
Product EAN number	5410288302249
Packaging single length / height (cm)	4.6
Packaging single width (cm)	3.8
Packaging single depth (cm)	15.8
DUN14 (outer)	15410288302246
Units per outer package	6
Packaging outer length / height (cm)	15.0
Packaging outer width (cm)	8.6
Packaging outer depth (cm)	20.4


Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not suitable for household

PHOTOMETRY

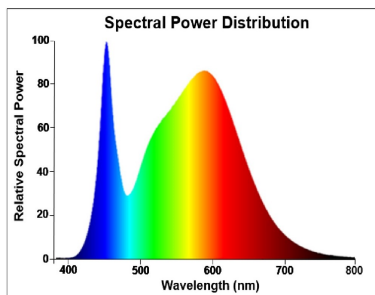

TECHNICAL DRAWINGS




ToLEDo LYNX DE

ToLEDo Lynx DE 770LM G24Q 840 SL
0030224



SYLVANIA

0030224

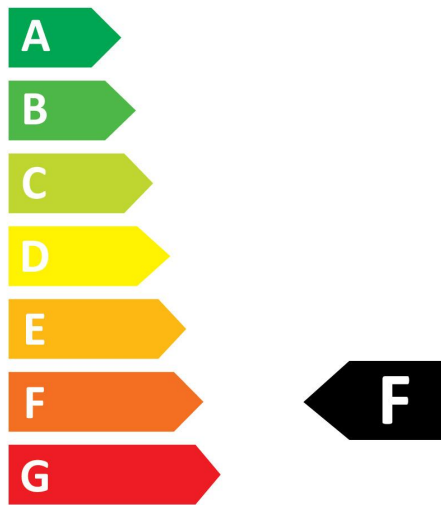

7
kWh/1000h



2019/2015

SYLVANIA

ToLEDo LYNX DE

ToLEDo Lynx DE 770LM G24Q 840 SL

0030224



0030224



7
kWh/1000h



2019/2015