

Start Batten non-dimmable
Start Batten 1800 5000/9000lm 830/840
0048980



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing, Traffic white (RAL9016) iron housing, 4550 - 9200lm (selected by DIP switches), 33 - 68W, 124-152lm/W, Integrated switch allows to choose between warm white (3000K) and neutral white (4000K) colour temperatures, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 120000 hrs L70B50 lifespan, Non-dimmable driver, IK08, IP20, 1800 x 64 x 65mm (LxWxH) dimensions, 1.73kg weight. BESA compatibility. End cap incorporates 20mm conduit knock out.



PRODUCT OVERVIEW

Product name	Start Batten 1800 5000/9000lm 830/840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4279485
Warranty	5 years
Fixture luminous flux (lm)	9200
Luminaire efficacy (lm/W)	135
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	145x110
Photobiological Risk Group	RG1
Total power consumption (W)	68
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK08
Product EAN number	5410288489803

DATA TABLE

General data	
Product name	Start Batten 1800 5000/9000lm 830/840
Technology	LED
Cap/Base	N/A
Housing	Steel

Start Batten non-dimmable

Start Batten 1800 5000/9000lm 830/840

0048980

General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4279485
Warranty	5 years

Optical data

Fixture luminous flux (lm)	9200
Luminaire efficacy (lm/W)	135
Correlated colour temperature range (K)	3000 - 4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	145x110
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	68
Primary Supply/Product voltage - min (V)	240.0
Primary Supply/Product voltage - max (V)	220
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	Yes
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	19
Inrush Duration (µs)	388
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	10
Max. products per 13A C Breaker	13
Max. products per 16A C Breaker	16
Max. products per 20A C Breaker	20
Max. products per 10A B Breaker	7
Max. products per 13A B Breaker	8
Max. products per 16A B Breaker	10
Max. products per 20A B Breaker	13
Connectable conductor cross section - Max (mm²)	1.5

Start Batten non-dimmable

Start Batten 1800 5000/9000lm 830/840
0048980

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B50	120000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1800
Nominal Product Width (mm)	64
Nominal Product Height (mm)	65
Weight (kg)	1.725



Packaging

Product EAN number	5410288489803
Packaging single length / height (cm)	180.0
Packaging single width (cm)	6.4
Packaging single depth (cm)	6.5
DUN14 (outer)	15410288489800
Units per outer package	6
Packaging outer length / height (cm)	182.0
Packaging outer width (cm)	15.3
Packaging outer depth (cm)	22.7


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

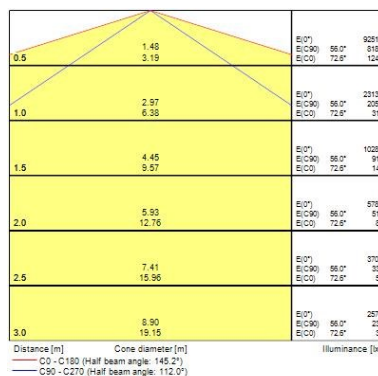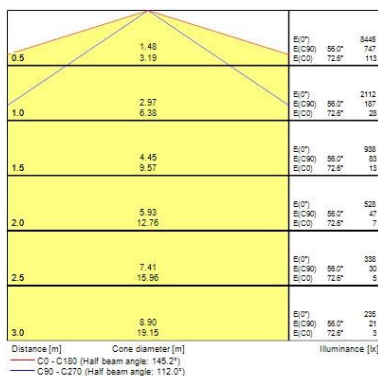

Start Batten non-dimmable
Start Batten 1800 5000/9000lm 830/840
0048980

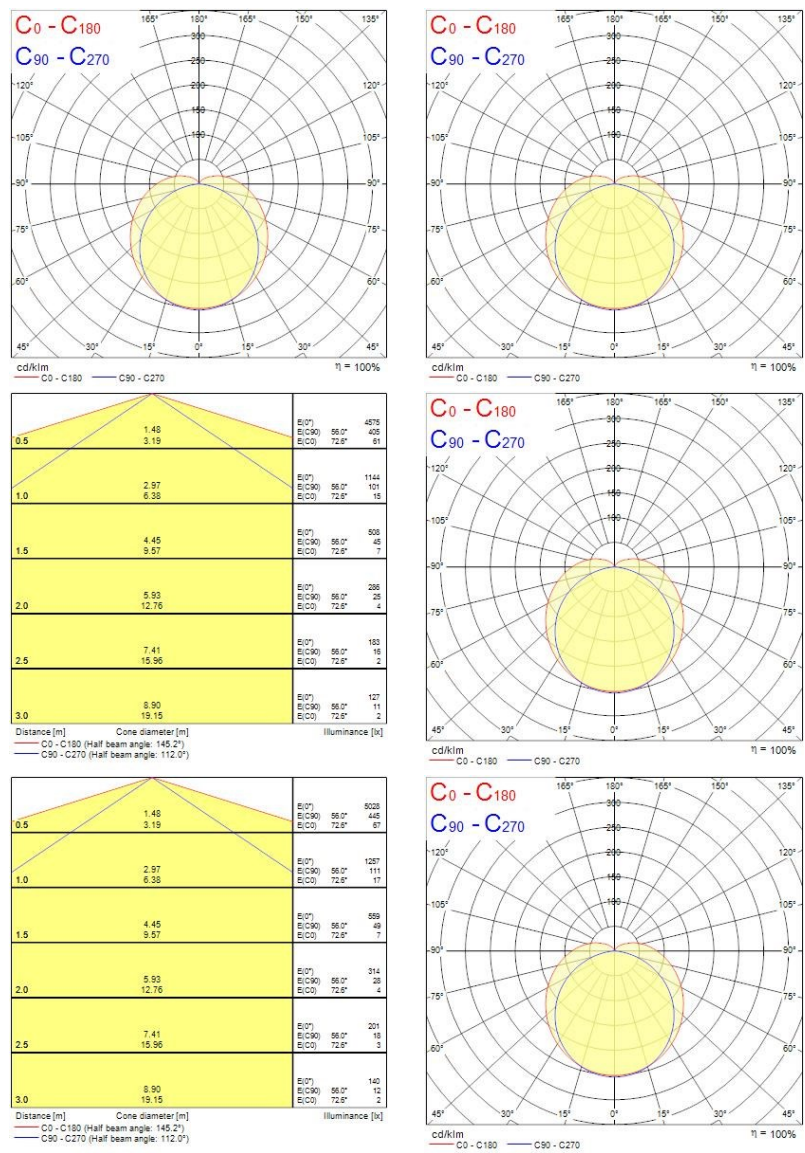

TECHNICAL DRAWINGS

