

Resisto fixed output

Resisto 1200 IP66 4800lm 840

0010211



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4800lm; 35W; 137lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark.



PRODUCT OVERVIEW

Product name	Resisto 1200 IP66 4800lm 840
Technology	LED
Housing	PC Polycarbonate
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357043
Warranty	5 years
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	137
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Glare control	< 24
Photobiological Risk Group	RG1
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102115

DATA TABLE

General data

Product name	Resisto 1200 IP66 4800lm 840
Technology	LED
Housing	PC Polycarbonate
General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892

Resisto fixed output Resisto 1200 IP66 4800lm 840 0010211

E-number FI	4357043
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	137
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam angle (Rated) (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1

Electrical data

Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
No. Of switching cycles before premature failures	>50000
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	41
Max. Luminaires per 13A C Breaker	53
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	82
Max. Luminaires per 10A B Breaker	41
Max. Luminaires per 13A B Breaker	53
Max. Luminaires per 16A B Breaker	65
Max. Luminaires per 20A B Breaker	82

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200

Resisto fixed output

Resisto 1200 IP66 4800lm 840
0010211

Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.32


Packaging

Single packaging type	Carton
Product EAN number	5410288102115
Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	15410288102112
Units per outer package	9
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	27.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

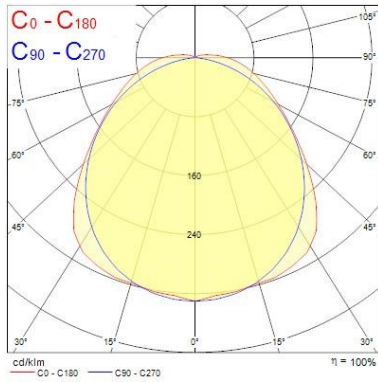

Distance [m]	Cone diameter [m]	Beam spread [°]	Beam spread [°]	Beam spread [°]
0.5	1.32	E(0°)	8341	
	1.35	E(C90)	52.8°	771
		E(C0)	53.4°	673
1.0	2.63	E(0°)	1586	
	2.69	E(C90)	52.8°	158
		E(C0)	53.4°	188
1.5	3.95	E(0°)	705	
	4.04	E(C90)	52.8°	78
		E(C0)	53.4°	91
2.0	5.27	E(0°)	396	
	5.39	E(C90)	52.8°	44
		E(C0)	53.4°	42
2.5	6.59	E(0°)	254	
	6.73	E(C90)	52.8°	38
		E(C0)	53.4°	27
3.0	7.90	E(0°)	176	
	8.00	E(C90)	52.8°	19
		E(C0)	53.4°	19

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 106.8°)
— C90 - C270 (Half beam angle: 105.6°)

TECHNICAL DRAWINGS

