

START Surface IP66

START SURFACE IK10 WHITE IP66 1000LM 840

0049287



Product features

- LED exterior surface mounted luminaire, 1100lm, 12W power consumption, 92lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant



PRODUCT OVERVIEW

IPC Code	0049287
Product name	START SURFACE IK10 WHITE IP66 1000LM 840
Technology	LED
Housing	PC
General application	Hospitality
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4274498
E-number SE	7505131
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
CRI (Ra)	80
Beam Angle (°)	110
Photobiological Risk Group	Group 0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	White RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492872
Lamps	Yes

DATA TABLE

General data

IPC Code	0049287
Product name	START SURFACE IK10 WHITE IP66 1000LM 840
Technology	LED
Housing	PC
General application	Hospitality
Operating temperature range (°C)	(-)20 To 45

START Surface IP66

START SURFACE IK10 WHITE IP66 1000LM 840
0049287

Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4274498
E-number SE	7505131

Optical data

Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
CRI (Ra)	80
Beam Angle (°)	110
Distribution type	Flood
Photobiological Risk Group	Group 0

Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V~
Electrical protection	Class II
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	15.7
Inrush Duration (µs)	68
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	42
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	70
Max. Luminaires per 10A B Breaker	40
Max. Luminaires per 13A B Breaker	48
Max. Luminaires per 16A B Breaker	57
Max. Luminaires per 20A B Breaker	68

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	40000
Lumen maintenance - L70 B10	30000
Lumen maintenance - L80 B50	30000
Lumen maintenance - L80 B20	20000
Lumen maintenance - L80 B10	18000
Lumen maintenance - L90 B50	15000
Lumen maintenance - L90 B20	12000
Lumen maintenance - L90 B10	8000

Physical data

Housing colour	White RAL9003
IP rating	IP66
IK rating	IK10

START Surface IP66

START SURFACE IK10 WHITE IP66 1000LM 840



0049287

Diffuser finish	Opal
Diffuser material	PC
Nominal Product Length (mm)	300
Nominal Product Width (mm)	300
Nominal Product Height (mm)	90
Nominal Product Diameter (mm)	300
Weight (kg)	0.78


Packaging

Single packaging type	Carton
Product EAN number	5410288492872
Packaging single length / height (cm)	30.2
Packaging single width (cm)	9.9
Packaging single depth (cm)	30.5
DUN14 (outer)	15410288492879
Units per outer package	6
Packaging outer length / height (cm)	61.5
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	32.0

PHOTOMETRY

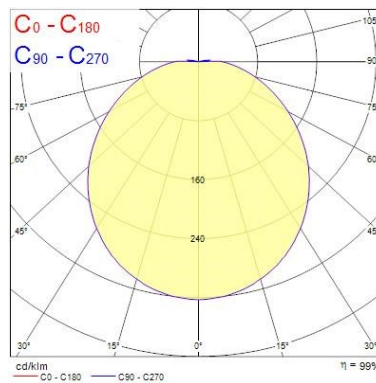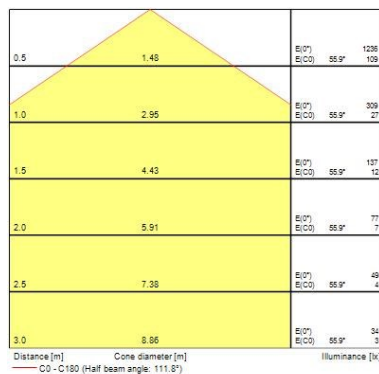

TECHNICAL DRAWINGS



START Surface IP66

START SURFACE IK10 WHITE IP66 1000LM 840
0049287

SYLVANIA 0049287

 This luminaire contains built in LED lamps.


 } L
E
D

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.


 } L
E
D

The lamps cannot be changed in the luminaire.

SYLVANIA 0049287  874/2012