

Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB

0039595

Product features

- Integrated LED highbay; Black aluminium housing; 13000lm; 90 W; 144 Lm/W; 4000K; Drive current: 780mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 308 x 166 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.



NOTES

undefined

PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 13000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357005
Warranty	5 years
Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	90
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes

Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB

0039595

LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288395951

DATA TABLE

General data

Product name	Granit IP65 0-10V 13000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C - 50°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC001716
E-number FI	4357005
Warranty	5 years

Optical data

Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Direct
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	90
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Drive current (mA)	780
Inrush Current (A)	80
Inrush Duration (µs)	520
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	12
Max. Luminaires per 13A C Breaker	15

Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB

0039595

Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 20A C Breaker	24
Max. Luminaires per 10A B Breaker	7
Max. Luminaires per 13A B Breaker	9
Max. Luminaires per 16A B Breaker	12
Max. Luminaires per 20A B Breaker	14

Lifetime data

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	308
Nominal Product Width (mm)	308
Nominal Product Height (mm)	166
Nominal Product Diameter (mm)	308
Weight (kg)	2.43

Packaging

Single packaging type	Carton
Product EAN number	5410288395951
Packaging single length / height (cm)	37.0
Packaging single width (cm)	37.0
Packaging single depth (cm)	18.0
DUN14 (outer)	05410288395951
Units per outer package	1
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	18.0

Safety data


Optimal operating condition (°C)	-30-50
----------------------------------	--------

PHOTOMETRY

Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB


0039595

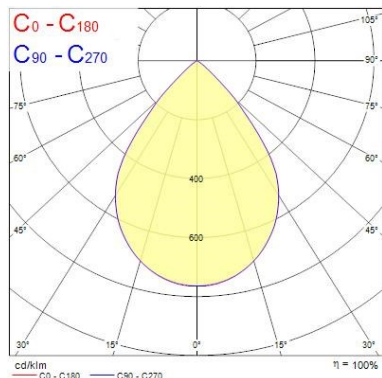

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.73	35077	9532
1.0	1.46	8789	2409
1.5	2.19	3897	1062
2.0	2.92	2192	614
2.5	3.65	1403	390
3.0	4.38	974	272

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 72.4°)
— C90 - C270 (Half beam angle: 72.2°)

Illuminance [lx]

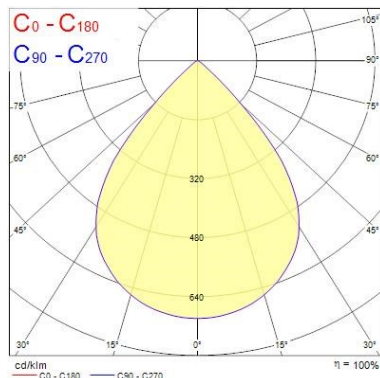

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.73	35077	9532
1.0	1.46	8789	2409
1.5	2.19	3897	1062
2.0	2.92	2192	614
2.5	3.65	1403	390
3.0	4.38	974	272

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 72.4°)
— C90 - C270 (Half beam angle: 72.2°)

Illuminance [lx]

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.78	39185	9632
1.0	1.57	9796	2409
1.5	2.35	4354	1069
2.0	3.14	2449	601
2.5	3.92	1567	385
3.0	4.70	1088	257

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 76.2°)

Illuminance [lx]

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.84	37969	8803
1.0	1.68	9492	2159
1.5	2.53	4219	945
2.0	3.37	2373	531
2.5	4.21	1519	342
3.0	5.05	1055	236


Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 80.2°)

Illuminance [lx]

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.78	39240	9636
1.0	1.57	9810	2409
1.5	2.35	4360	1071
2.0	3.14	2453	602
2.5	3.92	1570	385
3.0	4.70	1090	256

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 76.2°)

Illuminance [lx]

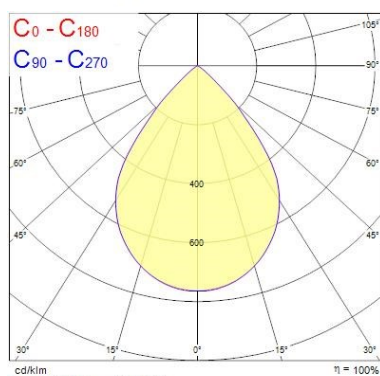


Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB

0039595


TECHNICAL DRAWINGS



SYLVANIA 0039595



This luminaire contains built-in LED lamps

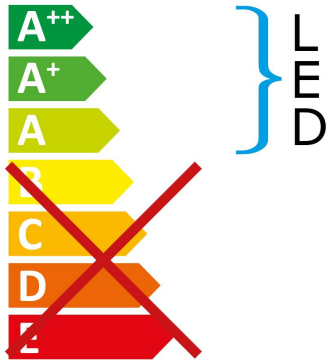

The lamps cannot be changed in the luminaire.

874/2012 

Granit 0-10V

Granit IP65 0-10V 13000lm 840 WB

0039595

