

## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1525lm 840  
0030327



### Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1525LM, 15W, 102lm/W, 4000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, 50,000 hrs (L70), (HxW) 55x195mm, 5 step MacAdam ellipse, Class 2, 220-240V, energy class: A++, A+, A



### PRODUCT OVERVIEW

IPC Code	0030327
Product name	START Downlight 175 IP44 1525lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality, Logistics & Industry, Office
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1525
Luminaire efficacy (lm/W)	102
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	White (RAL 9003)
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303277
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

## START DOWNLIGHT IP44 175

*START Downlight 175 IP44 1525lm 840*  
0030327

### General data

IPC Code	0030327
Product name	START Downlight 175 IP44 1525lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10 to +40
Operating temperature rated (°C)	40
Certifications	EUNEW008
ETIM Class	EC001744

### Optical data

Fixture luminous flux (lm)	1525
Luminaire efficacy (lm/W)	102
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Direct - Symmetrical
Glare control	< 25
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	15
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	390
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	14
Max. Luminaires per 16A C Breaker	17
Max. Luminaires per 20A C Breaker	20

### Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1525lm 840  
0030327



### Physical data

Housing colour	White (RAL 9003)
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	Polycarbonate
Reflector finish	Mirror
Nominal Product Length (mm)	195
Nominal Product Width (mm)	195
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Weight (kg)	0.371
Recessed Depth (mm)	150

### Packaging

Single packaging type	Carton
Product EAN number	5410288303277
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	6.8
DUN14 (outer)	15410288303274
Units per outer package	16
Packaging outer length / height (cm)	56.8
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	22.5


## PHOTOMETRY

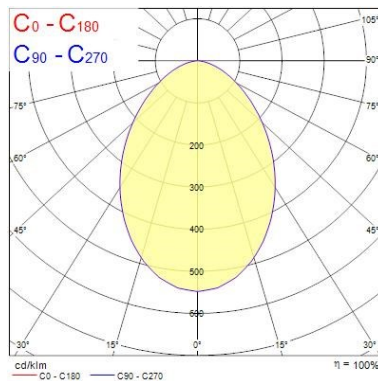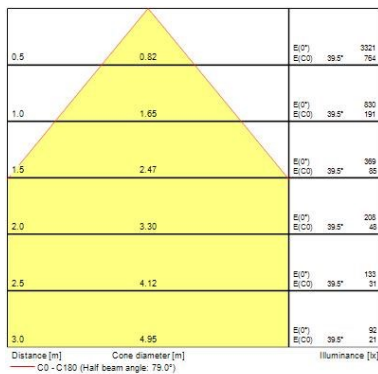


## TECHNICAL DRAWINGS


## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1525lm 840  
0030327




**SYLVANIA** 0030327

 This luminaire contains built-in LED lamps

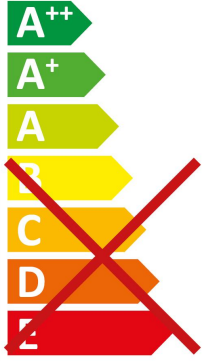
 } LED

The lamps cannot be changed in the luminaire.

874/2012 


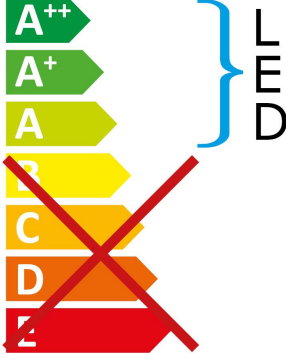
## START DOWNLIGHT IP44 175

START Downlight 175 IP44 1525lm 840  
0030327



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.



**SYLVANIA** 0030327

874/2012